


●使用方法

成型時使用

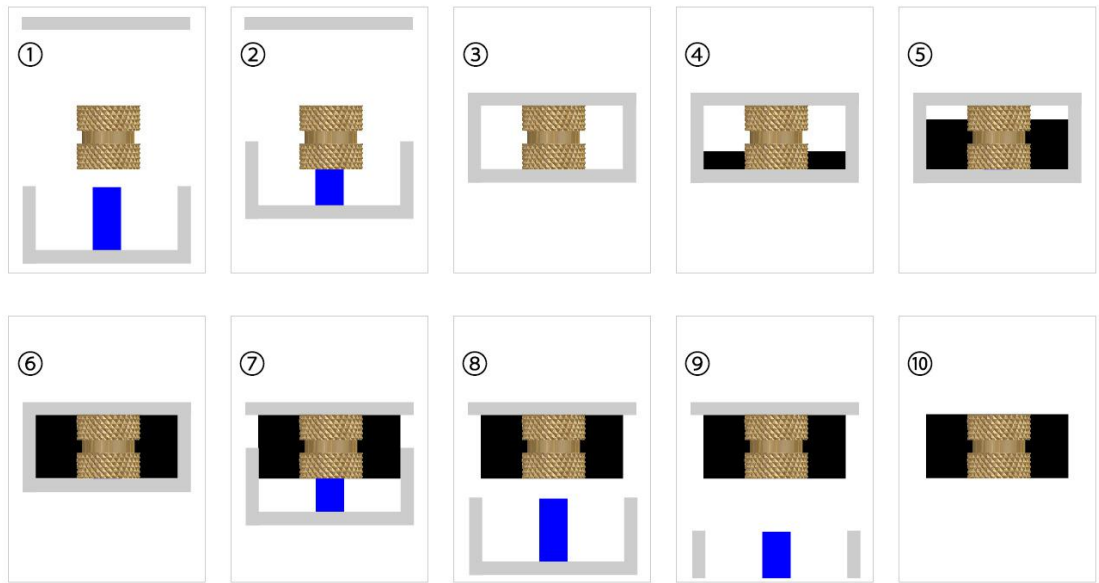


使用上の注意

インサートの入る個所の形状については色々なことが考えられますので必ずテストをしてから決定してください。

●寸法表

CRTX（同時成形カラー）

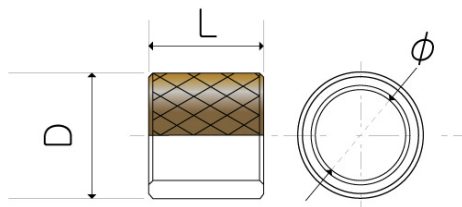

M3用

	φ	D	L
品番	±0.1	+0.05 -0.15	±0.05
CRTX-305020	φ3.2	φ5.0	2.0
CRTX-305025			2.5
CRTX-305030			3.0
CRTX-305035			3.5
CRTX-305040			4.0
CRTX-305045			4.5

	ϕ	D	L
品番	± 0.1	+0.05 -0.15	± 0.05
CRTX-305050			5.0
CRTX-305055			5.5
CRTX-305060			6.0
CRTX-305065			6.5
CRTX-305070			7.0
CRTX-305075			7.5
CRTX-305080			8.0
CRTX-305085			8.5
CRTX-305090			9.0
CRTX-305095			9.5
CRTX-3050100			10.0

M4用

	ϕ	D	L
品番	± 0.1	+0.05 -0.15	± 0.05
CRTX-406020	$\phi 4.3$	$\phi 6.0$	2.0
CRTX-406025			2.5
CRTX-406030			3.0
CRTX-406035			3.5
CRTX-406040			4.0
CRTX-406045			4.5
CRTX-406050			5.0
CRTX-406055			5.5
CRTX-406060			6.0

	ϕ	D	L
品番	± 0.1	+0.05 -0.15	± 0.05
CRTX-406065			6.5
CRTX-406070			7.0
CRTX-406075			7.5
CRTX-406080			8.0
CRTX-406085			8.5
CRTX-406090			9.0
CRTX-406095			9.5
CRTX-406100			10.0

M5用

	ϕ	D	L
品番	± 0.1	+0.05 -0.15	± 0.05
CRTX-507020	$\phi 5.3$	$\phi 7.0$	2.0
CRTX-507025			2.5
CRTX-507030			3.0
CRTX-507035			3.5
CRTX-507040			4.0
CRTX-507045			4.5
CRTX-507050			5.0
CRTX-507055			5.5
CRTX-507060			6.0
CRTX-507065			6.5
CRTX-507070			7.0
CRTX-507075			7.5

	ϕ	D	L
品番	± 0.1	+0.05 -0.15	± 0.05
CRTX-507080			8.0
CRTX-507085			8.5
CRTX-507090			9.0
CRTX-507095			9.5
CRTX-507100			10.0

M6用

	ϕ	D	L
品番	± 0.1	+0.05 -0.15	± 0.05
CRTX-608020	$\phi 6.3$	$\phi 8.0$	2.0
CRTX-608025			2.5
CRTX-608030			3.0
CRTX-608035			3.5
CRTX-608040			4.0
CRTX-608045			4.5
CRTX-608050			5.0
CRTX-608055			5.5
CRTX-608060			6.0
CRTX-608065			6.5
CRTX-608070			7.0
CRTX-608075			7.5
CRTX-608080			8.0
CRTX-608085			8.5
CRTX-608090			9.0

	ϕ	D	L
品番	± 0.1	+0.05 -0.15	± 0.05
CRTX-608095			9.5
CRTX-608100			10.0