


Patent pending

## Sube-up Tube for 3D Printer Filament-supply

Best suited tube for filament-supply

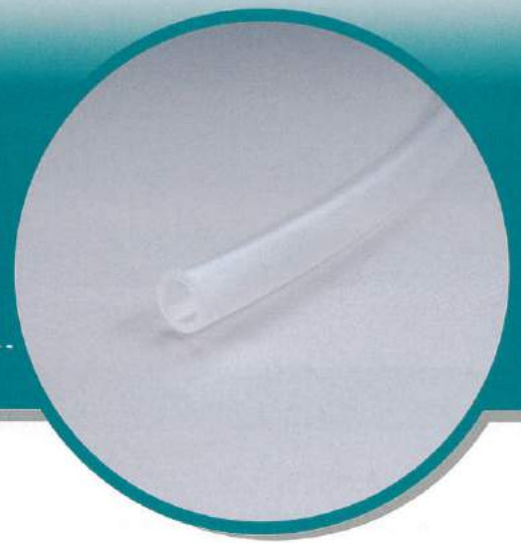

Sube-up tube is appropriate for supplying flexible filament of 3D printer.

When compared to the conventional fluororesin tube, Sube-up tube is very flexible so that the tube can follow the high-speed of the machine operation without kink folding. In addition, its inner surface is as smooth as the fluorine resin; therefore even the sticky, soft filament can go through without getting jammed.

FDM 3D printers require stable supply of filaments as it affects the quality of products, and Sube-up tube may meet that needs.

Please consult us for availability of diameter-size and color.

### Features

#### Smoothness



Its friction coefficient is as small as that of a fluororesin.

#### Flexibility



Unlike a fluororesin tube, this tube is very flexible.

#### Chemical Resistance



It has resistance to acids, alkali, and alcohol.

#### Specification



Please consult us for size, color, and outer sube-up.

### Applications

Guiding tube of 3D printers' filament-supply

Note: Product details are determined by separate negotiations as quality requirements vary according to the conditions under which the product will be used.

## HOTTY POLYMER Co.,Ltd.

Head Office 4-43-8,Higashimukojima,Sumida-ku,Tokyo,131-0032,Japan  
Phone.+81-3-3614-4100 Fax.+81-3-3614-4162

Kuki Factory 1-8,Kiyoku-kogyodanchi,Kuki,Saitama,346-0035,Japan  
Phone.+81-480-21-5645 Fax.+81-480-23-5663

<http://www.hotty.co.jp>



# Sube-up Tube for 3D Printer Filament-supply

Please consult us.

## Comparison Example

### <Fluororine Resin Tube>


Although its inner surface is smooth, the tube has difficulty in following the machine movement due to its hardness. Furthermore, the conventional tube easily kinks.

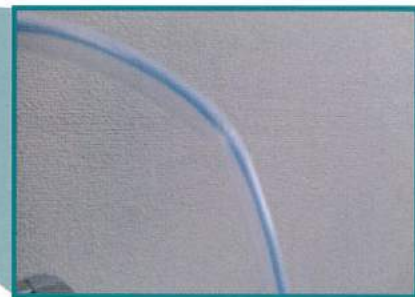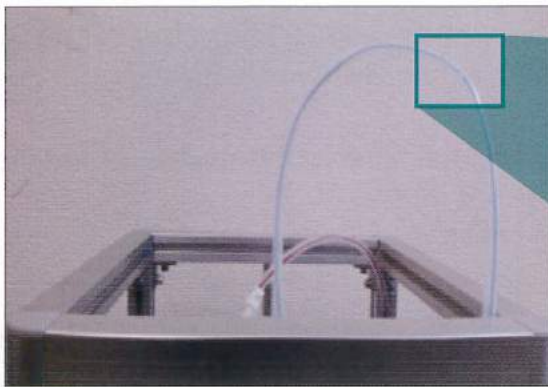

Magnified picture of bended tube

### <Sube-up Tube>

This product can improve bend performance of the guiding tube as it is made from soft resin.

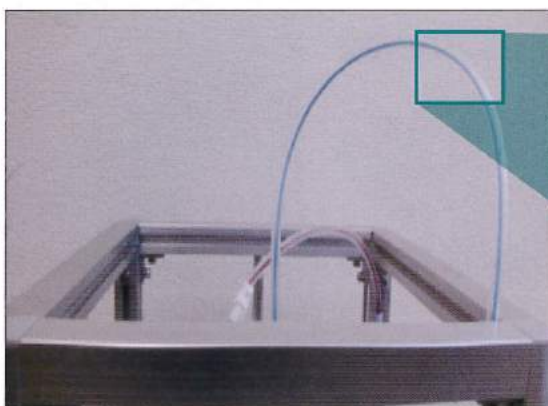

Magnified picture of bended tube

**HOTTY POLYMER Co.,Ltd.**

Head Office 4-43-8,Higashimukojima,Sumida-ku,Tokyo,131-0032,Japan  
Phone.+81-3-3614-4100 Fax.+81-3-3614-4162

Kuki Factory 1-8,Kiyoku-kogyodanchi,Kuki,Saitama,346-0035,Japan  
Phone.+81-480-21-5645 Fax.+81-480-23-5663

<http://www.hotty.co.jp>