



ASEAN MODEL Handy automatic screwdriver **FEEDMAT®** *FM503H-MG*

FEATURE

Automatic screw mounting

The screw is automatically attached directly to the tip of the bit.


It can also be tightened into narrow areas and bag holes.



Main specification


Application screw	Nominal diameter	M2~M4	
	Length	6~14mm	
	Recess shape	Cross	
Driver type	Model	SK-3220P(B)	SK-3280P(B)
	Torque	0.2~1.18N·m	0.29~1.86N·m
	No-load rotation speed	1,000r.p.m	
Feeder	Model	FM503H	
	Hopper capacity	450cc	
Power supply		Single phase AC220V 50/60Hz	
Air pressure		0.4~0.5Mpa	

External dimensions of Tool unit

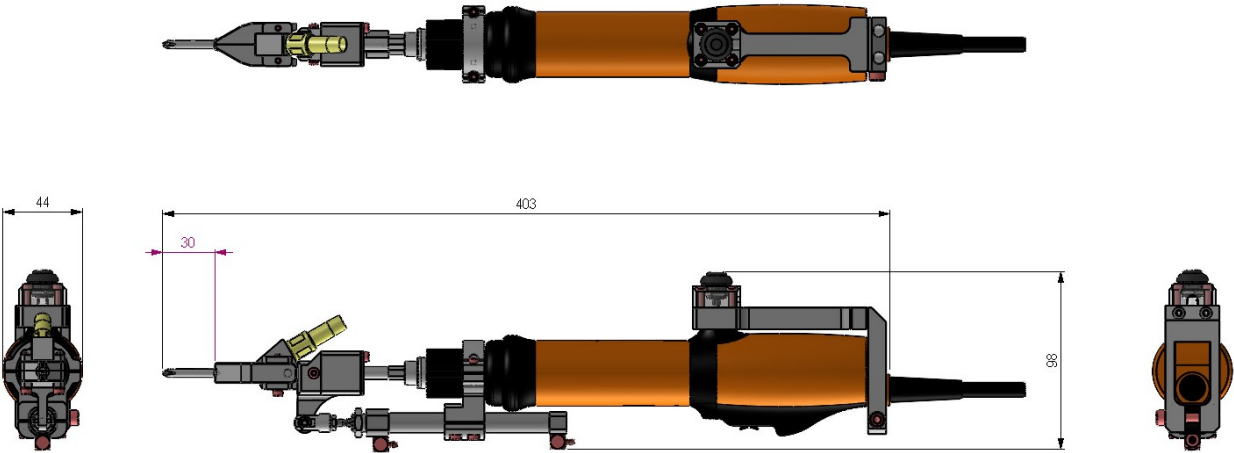

External dimensions of Feeder

FM503H

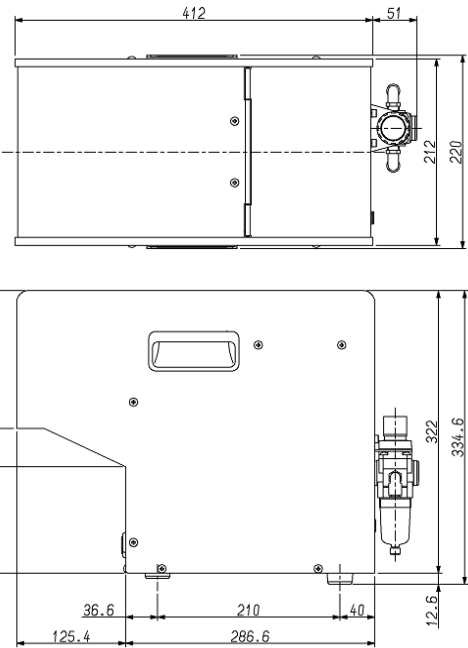

THAI NITTO SEIKO MACHINERY CO., LTD.

9/158 Moo 5, Phaholyotin Road, Klong 1, Khlong, Pathumthani 12120, Thailand
TEL 02-902-0916~18 FAX 02-902-0977